

Smartline plus 8

Technical Specifications

Pressure ulcer grade	● I ● II ● III ● IV
Max. patient weight	200 kg


Item No.	996700 / 102190
----------	-----------------

Control unit

Measurements	approx. 28 x 16 x 10 cm
Weight	1.7 kg
Power	230 V/50 Hz
Pressure range	20 - 55 mmHg, pressure sensor inside
Cycle time	10 min.
Features	detachable power cable
Alarm functions	Low pressure alarm (with mute function) Power failure alarm

Mattress

Measurements	approx. 200 x 90 x 20 cm
Weight	7.3 kg
Material cells	20 Nylon/TPU (cell-on-cell square shape)
Material cover	Bi-elastic PU coated, breathable, slip-retardant & water repellent
Material base	Nylon/PVC with 4 fixation straps
Features	Rotatable CPR emergency ventilation, Transport function with quick connectors, 3 static head cells, 5 heel cells with self-closing valves

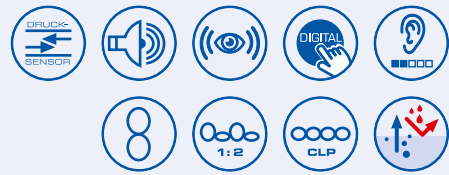

The Smartline plus 8 inch mattress system is suitable for the prevention and treatment of pressure ulcers up to grade IV according to EUPAP.

The control unit of the Smartline plus 8 feature the digital pressure sensor technology thus ensuring a near silent operation and a long product life. The compressors switch off when reaching the pre-set system pressure and only reactivate when a cycle change occurs or to adjust the system pressure if necessary.

Highlights

- Mattress replacement system
- Bi-elastic PU coated, highly breathable, slip-retardant & water repellent
- All-round zipper
- 20 nylon/TPU air cells
- CPR emergency ventilation
- Transport function with quick connector valves
- LED weight setting indicator
- Alternating pressure cycle (10 min.) & static mode (CLP)
- Low pressure and power failure alarm (visual and audible)
- Max. patient weight 200 kg

