

Smartline plus 5

Technical Specifications

Pressure ulcer grade	● I ● II ● III ● IV
Max. patient weight	160 kg


Item No.	996600S / 102149
----------	------------------

Control unit

Measurements	approx. 28 x 16 x 10 cm
Weight	1.7 kg
Power	230 V/50 Hz
Pressure range	20 - 55 mmHg, pressure sensor inside
Cycle time	10 min.
Features	Alternating/static mode, with detachable power cable
Alarm functions	Low pressure alarm (with mute function) Power failure alarm

Mattress

Measurements	approx. 200 x 88 x 13 cm
Weight	3.8 kg
Material cells	17 Nylon/TPU
Material cover	Bi-elastic PU coated, breathable, slip-retardant & water repellent
Material base	Nylon/PVC with 4 fixation straps
Features	CPR emergency ventilation, transport function with quick connectors, 3 head cells static

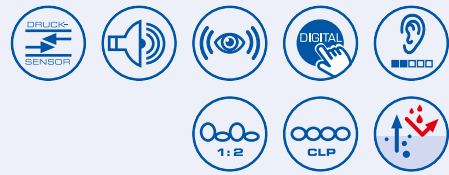

The Smartline plus 5 mattress system is suitable for the prevention and treatment of pressure ulcers up to grade III according to EPUAP.

The control units of the Smartline Plus feature the digital pressure sensor technology thus ensuring a silent operation and a long product life. The compressors automatically switch off when the pre-set system pressure is reached and only re-activate when a cycle change occurs or to adjust the system pressure if necessary.

Highlights

- Bi-elastic PU coated, breathable, slip-retardant & water repellent
- All-round zipper
- 17 nylon/TPU air cells
- CPR emergency ventilation
- Transport function with quick connector valves
- LED weight setting indicator
- Alternating pressure cycle (10 min.) & static mode (CLP)
- Low pressure and power failure alarm (visual and audible)
- Max. patient weight 160 kg

